



Date: _____	Location: _____
Product: _____	Project: _____
Quantity: _____	Catalog #: _____

LED 4FT 17W T8 Type B Tube

CONSTRUCTION:

Glass body and soft light.

OPTICAL SYSTEM:

Bridgelux 2835 LED chips. 240° beam angle

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. double ended is available which can be compatible with shunted or non-shunted sockets. -20°C to 45°C, -4°F to 113°F.

INSTALLATION & MOUNTING:

Type B double ended.

FEATURES

- Type B Double Ended
- Low thermal decay & maintenance
- No Mercury or UV
- IP20 rated
- Suitable for enclosed fixtures
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Commercial buildings
- Hotels
- Conference rooms
- Schools
- Supermarkets
- Factories
- Hospitals
- Office Buildings
- Airports

DLC Product ID:

- LOC-T84FT-17W50K-G B – PLUK9UI2AIYO
- LOC-T84FT-17W65K-G B – PLF4DZWLP HQ8



OPTIONAL ACCESSORY:



Emergency Battery
LOC-EMDR-25WHV

LOC-T84FT-17W50K-G B


WATTAGE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTO	THD	REPLACES
17W	5000K	2,200LM	130lm/W	120-277V	80	0.9	15%	32W

LOC-T84FT-17W65K-G B

WATTAGE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTO	THD	REPLACES
17W	6500K	2,200LM	130lm/w	120-277V	80	0.9	15%	32W

LED 4FT 17W T8 Type B Tube

MEASUREMENTS

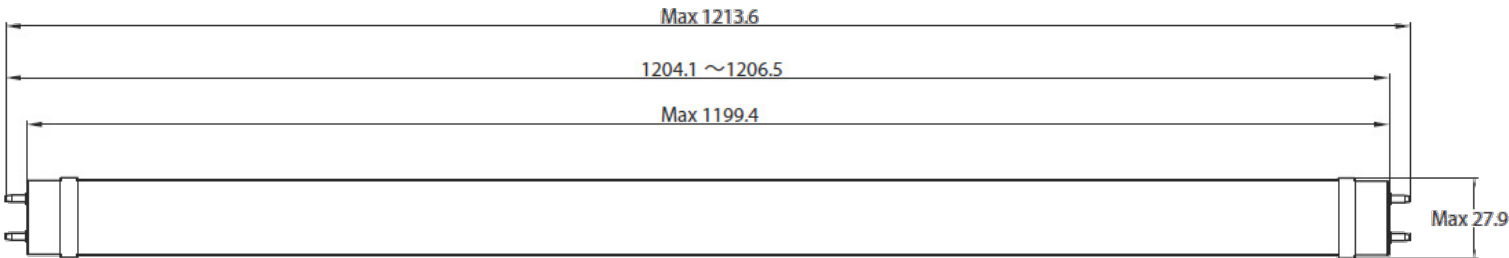

MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-T84FT-17W50K-G B	1	0.46 lbs	00810050941297
LOC-T84FT-17W65K-G B	1	0.46 lbs	00810050941303

PHOTOMETRIC DATA

