


PRODUCT DESCRIPTION:

Designed to fit any ceiling surface 6.0" – 7.4" (153-190mm). Suspended and hanging for other types of ceilings such as art galleries, homes, schools, offices, hotels, restaurants, retail stores and other commercial or industrial applications.

FEATURES:

- Adjustable wattage (10W / 15W / 22W)
- Adjustable CCT (3,000K / 4,000K / 5,000K)
- For retrofit or new construction installation
- Easy fit installation – spring action housing clips
- Universal housing compatibility
- Low maintenance
- No mercury
- Recyclable

DIMENSIONS:

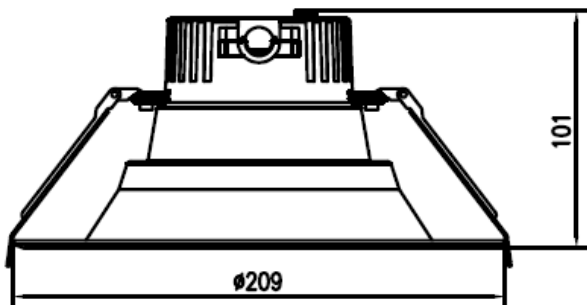

6" Downlight Multi Watt & Multi CCT







6" Downlight Multi Wattage & Multi CCT

Page: 2 of 3

SPECIFICATIONS:

SPECIFICATION	Details								
Item Code	573D2-22W								
Input Wattage (W)	22W								
Lumens Delivered (LM)				1,750LM	1,950LM	1,950LM			
Efficacy (LM/W)				79.5LM/W	88.6LM/W	88.6LM/W			
CRI	94								
Lifespan	50,000 hours								
Color Temperature				3,000K	4,000K	5,000K			
Wattage Equivalent	100W								
Dimmable	0-10V								
IP Rating	Damp Location								
Beam Angle	120								
Input Voltage	110-277V								
Power Factor	0.98								
Housing	Durable Plastic Housing								
Lens	Frosted								
Mounting	Spring Clips								
Size & Weight	8.22" x 3.97" lbs								
Certification	ES, ETL								
Operating Temperature	-20°C to 50°C (-4°F to 122°F)								
Environment	Indoor								
Warranty	5 years limited								

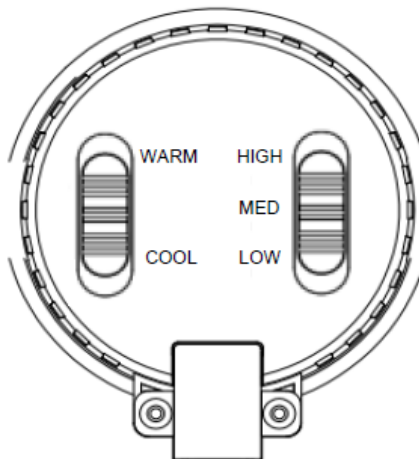


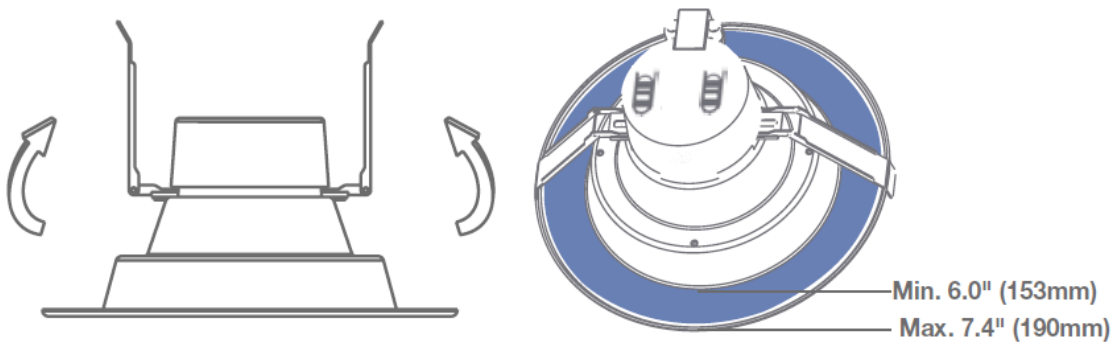


Retrofit Installation




Attach safety clip




Bypass ballast & wire to j-box



Adjust lumens or color to desired output




Push clips up & install into fixture




Ensure fixture is flush. Installation is complete


New Construction Installation




Attach safety clip




Wire to j-box



Adjust lumens or color to desired output



Push clips up & install into opening



Ensure fixture is flush. Installation is complete